

SNG

基板自立型: 105°C 2,000小时时间品
Snap-in Terminal Type Load Life:105°C 2,000 hours

规格表 SPECIFICATIONS

项目	性能				
工作温度范围 Category Temperature Range	-40 ~ 105°C				
额定电压范围 Rated Voltage Range	160 ~ 450V.DC				
静电容量允许偏差 Electrostatic Capacitance Tolerance	±20% (20°C, 120Hz)				
漏电流 Leakage Current	$I \leq 3\sqrt{CV}$ (5分钟值) (5minutes)				
	I=漏电流 Leakage Current (μA) C=静电容量 Electrostatic Capacitance (μF) V=额定电压 Rated Voltage (V)				
损耗角正切值 Dissipation Factor	20°C 120Hz				
	额定电压 (V) Rated Voltage	160~400	450		
	tan δ (Max)	0.15	0.20		
温度特性 / 阻抗比 Temperature Stability / Impedance Ratio	120Hz				
	额定电压 (V) Rated Voltage	160~400	450		
	Z-40°C/Z+20°C	6	8		
耐久性 Endurance	在105°C的环境中, 在不超过额定电压的范围内重叠印加规定的额定纹波电流2,000小时后应符合下列要求。 After 2,000 hour life test at 105°C with rated voltage and ripple current, the capacitors shall meet the following requirements .				
	静电容量变化率 Electrostatic Capacitance Change	初始值的 ± 20% ± 20% of the initial value			
	损耗角正切值 Dissipation Factor	初始值的200% 200% of the initial value			
	漏电流 Leakage Current	初始规格值 The initial specification value			
高温无负荷特性 Shelf Life	经过1,000个小时的保质寿命试验105°C,然后在20°C保存。经过预处理后 (JIS C 5102规范4.4),电容器应符合下列要求。 After 1,000 hour shelf life test at 105°C,then stored at 20°C.And after pre-treatment (JIS C 5102 4.4),the capacitors shall meet the following requirements.				
	静电容量变化率 Electrostatic Capacitance Change	初始值的 ± 20% ± 20% of the initial value			
	修正系数 Correction Coefficient	初始值 ± 10% Initial value ± 10%	初始值 ± 15% Initial value ± 15%	初始值 ± 20% Initial value ± 20%	初始值 ± 30% Initial value ± 30%
		0.7	0.85	1	2.47
	损耗角正切值 Dissipation Factor	初始值的200% 200% of the initial value			
漏电流 Leakage Current	初始规格值 The Initial specification value				

SNG

基板自立型: 105℃ 2,000小时时间品
Snap-in Terminal Type Load Life: 105℃ 2,000 hours

■ 纹波电流修正系数 / CORRECTION COEFFICIENT FOR RIPPLE CURRENT

1. 频率系数 Frequency Coefficient

频率 Frequency	60 (50)	120	500	1K	≥10K
系数 Coefficient	0.8	1.0	1.2	1.3	1.5


2. 周围温度系数 Temperature Coefficient

周围温度(℃) Ambient Temperature	105	85	65
系数 Coefficient	1.0	1.7	2.1

■ 尺寸图 / DIMENSIONS

标准端子 / Standard terminal type

短端子 / Short terminal type

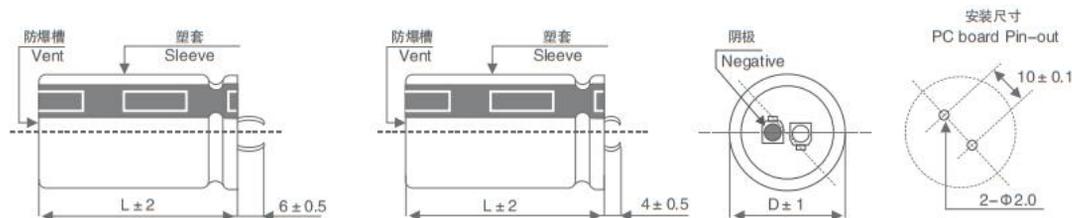

■ 产品代码规则 / PRODUCT CODE SYSTEM



■ 产品型号体系 / PRODUCT MODE

电压代码 Voltage Code	系列代码 Series Code	容量代码 Capacitance Code	允许偏差代码 Allowable Tolerance Code	尺寸代码 Size Code	设计代码 Design code	端子 Terminal
----------------------	---------------------	--------------------------	------------------------------------	-------------------	---------------------	----------------

SNG

标准品一览表、额定纹波电流

TYPICAL DIMENSIONS、RATED RIPPLE CURRENT

V.DC	Cpa (uF)	外壳尺寸 Case Size φD±1×L± 2mm	纹波电流 arms/105℃ Ripple current Arms/105℃, 120Hz	产品型号 Part No	V.DC	Cpa (uF)	外壳尺寸 Case Size φD±1×L± 2mm	纹波电流 arms/105℃ Ripple current Arms/105℃, 120Hz	产品型号 Part No
160	270	22 × 25	0.99	160SNG271M2225YZB	180	270	22 × 25	0.88	180SNG271M2225YZB
	330	22 × 25	1.11	160SNG331M2225YZB		330	22 × 25	0.96	180SNG331M2225YZB
	390	22 × 30	1.19	160SNG391M2230YZB		390	22 × 30	1.19	180SNG391M2230YZB
	390	25 × 25	1.17	160SNG391M2525YZB		390	25 × 25	1.19	180SNG391M2525YZB
	470	22 × 35	1.28	160SNG471M2235YZB		470	22 × 35	1.26	180SNG471M2235YZB
	470	25 × 25	1.29	160SNG471M2525YZB		470	25 × 30	1.31	180SNG471M2530YZB
	560	22 × 40	1.38	160SNG561M2240YZB		470	30 × 25	1.28	180SNG471M3025YZB
	560	25 × 30	1.39	160SNG561M2530YZB		560	22 × 40	1.44	180SNG561M2240YZB
	560	30 × 25	1.44	160SNG561M3025YZB		560	25 × 35	1.46	180SNG561M2535YZB
	680	22 × 45	1.59	160SNG681M2245YZB		560	30 × 25	1.39	180SNG561M3025YZB
	680	25 × 35	1.58	160SNG681M2535YZB		680	22 × 45	1.64	180SNG681M2245YZB
	680	30 × 25	1.59	160SNG681M3025YZB		680	25 × 40	1.66	180SNG681M2540YZB
	820	22 × 50	1.75	160SNG821M2250YZB		680	30 × 30	1.65	180SNG681M3030YZB
	820	25 × 40	1.86	160SNG821M2540YZB		680	35 × 25	1.66	180SNG681M3525YZB
	820	30 × 30	1.85	160SNG821M3030YZB		820	22 × 50	1.88	180SNG821M2250YZB
	820	35 × 25	1.76	160SNG821M3525YZB		820	25 × 45	1.88	180SNG821M2545YZB
	1,000	25 × 45	2.05	160SNG102M2545YZB		820	30 × 35	1.92	180SNG821M3035YZB
	1,000	30 × 35	2.06	160SNG102M3035YZB		820	35 × 25	1.82	180SNG821M3525YZB
	1,000	35 × 25	1.98	160SNG102M3525YZB		1,000	25 × 50	2.19	180SNG102M2550YZB
	1,200	25 × 50	2.31	160SNG122M2550YZB		1,000	30 × 40	2.19	180SNG102M3040YZB
	1,200	30 × 40	2.31	160SNG122M3040YZB		1,000	35 × 30	2.22	180SNG102M3530YZB
	1,200	35 × 30	2.31	160SNG122M3530YZB		1,200	30 × 45	2.38	180SNG122M3045YZB
	1,500	30 × 45	2.66	160SNG152M3045YZB		1,200	35 × 35	2.36	180SNG122M3535YZB
	1,500	35 × 35	2.38	160SNG152M3535YZB		1,500	30 × 50	2.82	180SNG152M3050YZB
1,800	30 × 50	3.18	160SNG182M3050YZB	1,500	35 × 40	2.82	180SNG152M3540YZB		
1,800	35 × 45	3.18	160SNG182M3545YZB	1,800	35 × 45	3.01	180SNG182M3545YZB		
2,200	35 × 50	3.63	160SNG222M3550YZB	2,200	35 × 50	3.44	180SNG222M3550YZB		

SNG

标准品一览表、额定纹波电流

TYPICAL DIMENSIONS、RATED RIPPLE CURRENT

V.DC	Cpa (uF)	外壳尺寸 Case Size φD±1×L± 3mm	纹波电流 arms/105℃ Ripple current Arms/105℃, 120Hz	产品型号 Part No	V.DC	Cpa (uF)	外壳尺寸 Case Size φD±1×L± 3mm	纹波电流 arms/105℃ Ripple current Arms/105℃, 120Hz	产品型号 Part No
200	220	22×25	0.71	200SNG221M2225 YZB	250	150	22×25	0.66	250SNG151M2225 YZB
	270	22×25	0.79	200SNG271M2225 YZB		180	22×25	0.72	250SNG181M2225 YZB
	330	22×30	1.08	200SNG331M2225 YZB		220	22×30	0.88	250SNG221M2230 YZB
	330	25×25	1.09	200SNG331M2525 YZB		220	25×25	0.88	250SNG221M2525 YZB
	390	22×35	1.19	200SNG391M2235 YZB		270	22×35	1.02	250SNG271M2235 YZB
	390	25×25	1.19	200SNG391M2525 YZB		270	25×25	0.96	250SNG271M2525 YZB
	470	22×40	1.28	200SNG471M2240 YZB		330	22×40	1.19	250SNG331M2240 YZB
	470	25×30	1.29	200SNG471M2530 YZB		330	25×30	1.14	250SNG331M2530 YZB
	470	30×25	1.38	200SNG471M3025 YZB		330	30×25	1.19	250SNG331M3025 YZB
	560	22×45	1.44	200SNG561M2245 YZB		390	22×45	1.39	250SNG391M2245 YZB
	560	25×35	1.41	200SNG561M2535 YZB		390	25×35	1.39	250SNG391M2535 YZB
	560	30×25	1.51	200SNG561M3025 YZB		390	30×25	1.29	250SNG391M3025 YZB
	680	22×50	1.61	200SNG681M2250 YZB		470	22×45	1.40	250SNG471M2245 YZB
	680	25×40	1.61	200SNG681M2540 YZB		470	22×50	1.48	250SNG471M2250 YZB
	680	30×30	1.61	200SNG681M3030 YZB		470	25×40	1.48	250SNG471M2540 YZB
	680	35×25	1.59	200SNG681M3525 YZB		470	25×50	1.50	250SNG471M2550 YZB
	820	25×50	1.98	200SNG821M2550 YZB		470	30×30	1.48	250SNG471M3030 YZB
	820	30×35	1.95	200SNG821M3035 YZB		470	35×25	1.48	250SNG471M3525 YZB
	820	35×30	1.98	200SNG821M3530 YZB		560	25×45	1.68	250SNG561M2545 YZB
	1,000	25×45	2.00	200SNG102M2545 YZB		560	30×35	1.68	250SNG561M3035 YZB
1,000	30×45	2.16	200SNG102M3045 YZB	560	35×30	1.68	250SNG561M3530 YZB		
1,000	30×35	2.00	200SNG102M3035 YZB	680	25×50	1.72	250SNG681M2550 YZB		
1,000	35×35	2.16	200SNG102M3535 YZB	680	30×40	1.89	250SNG681M3040 YZB		
1,200	30×50	2.48	200SNG122M3050 YZB	680	35×30	1.86	250SNG681M3530 YZB		
1,200	35×40	2.54	200SNG122M3540 YZB	820	30×45	2.02	250SNG821M3045 YZB		
1,500	30×50	3.78	200SNG152M3050 YZB	820	35×35	1.88	250SNG821M3535 YZB		
1,500	35×45	2.89	200SNG152M3545 YZB	1,000	35×40	2.11	250SNG102M3540 YZB		
1,800	35×50	3.33	200SNG182M3550 YZB	1,200	35×35	2.30	250SNG122M3535 YZB		
				1,200	35×45	2.33	250SNG122M3545 YZB		

SNG

标准品一览表、额定纹波电流

TYPICAL DIMENSIONS、RATED RIPPLE CURRENT

V,DC	Cpa (uF)	外壳尺寸 Case Size φD±1×L± 3mm	纹波电流 arms/105°C Ripple current Arms/105°C, 120Hz	产品型号 Part No	V,DC	Cpa (uF)	外壳尺寸 Case Size φD±1×L± 3mm	纹波电流 arms/105°C Ripple current1 Arms/105°C, 120Hz	产品型号 Part No
350	68	22×25	0.48	350SNG680M2225YZB	400	150	22×45	0.75	400SNG151M2245YZB
	82	22×25	0.51	350SNG820M2225YZB		150	25×35	0.77	400SNG151M2535YZB
	100	22×30	0.62	350SNG101M2230YZB		150	30×25	0.77	400SNG151M3025YZB
	100	25×25	0.62	350SNG101M2525YZB		180	22×50	0.86	400SNG181M2250YZB
	120	22×35	0.69	350SNG121M2235YZB		180	25×40	0.85	400SNG181M2540YZB
	120	25×25	0.69	350SNG121M2525YZB		180	30×30	0.83	400SNG181M3030YZB
	150	22×40	0.75	350SNG151M2240YZB		180	35×25	0.85	400SNG181M3525YZB
	150	25×30	0.76	350SNG151M2530YZB		220	25×45	0.99	400SNG221M2545YZB
	150	30×25	0.76	350SNG151M3025YZB		220	30×35	0.98	400SNG221M3035YZB
	180	22×45	0.83	350SNG181M2245YZB		220	35×30	0.99	400SNG221M3530YZB
	180	25×35	0.83	350SNG181M2535YZB		270	25×50	1.14	400SNG271M2550YZB
	180	30×25	0.82	350SNG181M3025YZB		270	30×35	1.14	400SNG271M3035YZB
	220	22×50	0.98	350SNG221M2250YZB		270	30×40	1.14	400SNG271M3040YZB
	220	25×40	0.97	350SNG221M2540YZB		270	35×30	1.13	400SNG271M3530YZB
	220	30×30	0.95	350SNG221M3030YZB		330	30×40	1.18	400SNG331M3040YZB
	220	35×25	0.97	350SNG221M3525YZB		330	30×45	1.22	400SNG331M3045YZB
	270	25×45	1.09	350SNG271M2545YZB		330	35×35	1.18	400SNG331M3535YZB
	270	30×35	1.09	350SNG271M3035YZB		330	35×40	1.21	400SNG331M3540YZB
	270	35×30	1.11	350SNG271M3530YZB		390	30×50	1.43	400SNG391M3050YZB
	330	30×40	1.21	350SNG331M3040YZB		390	35×40	1.42	400SNG391M3540YZB
	330	35×30	1.21	350SNG331M3530YZB		390	35×45	1.45	400SNG391M3545YZB
	390	30×45	1.44	350SNG391M3045YZB		470	35×35	1.55	400SNG471M3535YZB
	390	35×35	1.41	350SNG391M3535YZB		470	35×40	1.60	400SNG471M3540YZB
	470	35×40	1.58	350SNG471M3540YZB		470	35×45	1.66	400SNG471M3545YZB
560	35×45	1.75	350SNG561M3545YZB	470	35×50	1.71	400SNG471M3550YZB		
400	68	22×25	0.48	400SNG680M2225YZB	560	30×60	2.02	400SNG561M3060YZB	
	82	22×30	0.52	400SNG820M2230YZB	560	35×40	1.96	400SNG561M3540YZB	
	82	25×25	0.55	400SNG820M2525YZB	560	35×45	2.01	400SNG561M3545YZB	
	100	22×35	0.59	400SNG101M2235YZB	560	35×50	2.22	400SEG561M3550YZB	
	100	25×25	0.62	400SNG101M2525YZB	680	35×40	2.31	400SNG681M3540YZB	
	120	22×40	0.66	400SNG121M2240YZB	680	35×50	2.40	400SNG681M3540YZB	
	120	25×30	0.66	400SNG121M2530YZB	680	35×55	2.45	400SNG681M3555YZB	
	120	30×25	0.66	400SNG121M3025YZB	820	35×60	2.70	400SNG821M3560YZB	
					1000	40×60	2.90	400SNG102M4060YZB	

SNG

标准品一览表、额定纹波电流

TYPICAL DIMENSIONS、RATED RIPPLE CURRENT

V.DC	Cpa (uF)	外壳尺寸 Case Size φD ± 1 × L ± 3mm	纹波电流 arms/105℃ Ripple current Arms/105℃, 120Hz	产品型号 Part No
450	56	22 × 25	0.36	450SNG560M2225YZB
	68	22 × 30	0.45	450SNG680M2230BYZ
	68	25 × 25	0.45	450SNG680M2525BYZ
	82	22 × 35	0.51	450SNG820M2235YZB
	82	25 × 25	0.51	450SNG820M2525YZB
	100	22 × 40	0.59	450SNG101M2240YZB
	100	25 × 30	0.53	450SNG101M2530YZB
	100	25 × 35	0.55	450SNG101M2535BYZ
	100	30 × 25	0.59	450SNG101M3025YZB
	120	22 × 45	0.66	450SNG121M2245YZB
	120	25 × 35	0.65	450SNG121M2535YZB
	120	30 × 25	0.64	450SNG121M3025YZB
	150	22 × 50	0.71	450SNG151M2250YZB
	150	25 × 40	0.68	450SNG151M2540YZB
	150	30 × 30	0.67	450SNG151M3030YZB
	150	35 × 25	0.68	450SNG151M3525YZB
	180	25 × 45	0.77	450SNG181M2545YZB
	180	30 × 35	0.79	450SNG181M3035YZB
	180	35 × 30	0.71	450SNG181M3530YZB
	220	25 × 50	0.92	450SNG221M2550YZB
	220	30 × 40	0.92	450SNG221M3040YZB
	220	35 × 30	0.93	450SNG221M3530YZB
	270	30 × 45	1.11	450SNG271M3045YZB
	270	35 × 35	1.13	450SNG271M3535YZB
	330	30 × 45	1.20	450SNG331M3045YZB
	330	30 × 50	1.22	450SNG331M3050YZB
	330	35 × 40	1.22	450SNG331M3540YZB
	330	35 × 45	1.30	450SNG331M3545YZB
	390	35 × 45	1.41	450SNG391M3545YZB
	470	35 × 50	1.58	450SNG471M3550YZB
560	35 × 50	1.65	450SNG561M3550YZB	

●重要说明 Important note

- ◆KAOUNE并不了解每一个客户对产品的应用，也不比客户更了解他们对产品的应用。因此，客户负有最终的责任，根据其整机电路参数选择适合其的KAOUNE产品，并根据KAOUNE产品参数判定其是否适用。
- ◆我们也毫不避讳地指出，即使在正常的应用条件下无源电子元器件仍有可能在使用寿命结束前出现故障或失效。这在目前的技术水平下是无法完全排除的。因此，对于操作安全水平要求非常高的应用场合，特别是当无源电子元器件出现故障时可能会危及人身安全或健康的情况下，客户必须适当设计其应用装置或由客户采取措施（如安全保护性电路或冗余），确保在无源电子元件出现故障时，第三方不会受到伤害或损害。
- ◆我们的工程师持续不断地致力于改善产品。因此，本出版物所述产品可能会发生变化。所以，订货之前或订货的时候请咨询我们的销售工程师本出版物的产品说明和规格在多大程度上是适用的。我们保留产品尺寸及技术参数发生变更的权利。因此，我们不保证任何时候均可购买到本出版物所列全部产品。
- ◆由于客户的应用领域、安装尺寸、回路参数要求千差万别，对于同一电压同一容值的电容器亦是如此。因此，建议在订货前尽可能详尽地提供您所要求的信息，包括但不限于电压、容值、外形尺寸、安装尺寸及本出版物中《订货信息一览表》中所列明的项目。
- ◆KAOUNE do not understand each client on the application of the product, nor more than customers about their products. Customers have the ultimate responsibility to select suitable KAOUNE products for their whole circuit parameters, and under KAOUNE products parameters determine its applicability.
- ◆We also forthrightly pointed out that even in normal conditions of passive electronic components, it is still will failure or breakdown before the end of its useful life. And it cannot be completely excluded in the current level of technology. Therefore, requires a high level of operational safety applications, especially when passive electronic components failure could endanger the personal safety or health of the case, The customer must be properly designed appliance or measures taken by the customer (such as security protective circuitry or redundancy), to ensure when the failure in the passive electronic components, the third party will not harm or damage.
- ◆KAOUNE engineers constantly committed to improve the product. Therefore, the publication of the product may change. Therefore, please consult our sales engineer before order. We reserve the right to change the product dimensions and technical parameters. Therefore, we cannot guarantee that at any time can be purchased to the publications listed all products.
- ◆Due to the customer's applications, installation size, circuit parameters requirements vary widely, as well as the same capacitor values for the same voltage. Therefore, we suggest that provide requested information as much details as possible before order, including but not limited to voltage, capacitance, dimensions, installation size and the other parameters items of order information.

● 敬告和警告 Warning



- ◆ 电容器经过耐压测试后或退出运行后，其上存储的能量足以对人身造成伤害。因此，在接触电容器出线端子之前必须首先经过电阻放电、再短接引出端子，确保残存电荷泄放掉。
- ◆ 金属化薄膜介质电容器不应过多直接短路放电。短路放电试验属于型式试验项目，做过型式试验的产品不宜再正常使用。
- ◆ 进行耐压测试会对其绝缘造成损害，且该损害具备累积效应。
- ◆ 电容器与电路的连接应可靠，避免接触不良引起高频振荡造成电容器过压或过热。
- ◆ 避免电容器暴露于强酸、强碱及其他腐蚀性介质的环境中运行。
- ◆ 避免电容器在充满易燃易爆的气体或尘埃的环境中运行。
- ◆ 避免外部能量传导到电容器内部，如火、热、雷电。
- ◆ 避免电容器过温运行。
- ◆ 避免电容器异常过载。
- ◆ 避免核辐射。
- ◆ After resistant voltage test or out of operation, the capacitor stored energy is sufficient to cause the damage to the human. Therefore, in contact with the capacitor outlet terminals must discharge through the resistor first, and then short-circuited lead terminal, ensure that the residual charge of release.
- ◆ Metalized film dielectric capacitors should not over discharge to the short circuit. Short circuit discharge test are type of pilot projects, the test products are not appropriate to normal use.
- ◆ Excessive resistant voltage capacitor test will damage the insulation, and the damage has a cumulative effect.
- ◆ The capacitor circuit connection should be reliable, to avoid capacitor overvoltage or overheating by high-frequency oscillation because of poor contact.
- ◆ Avoid capacitor is exposed to strong acid, alkali and other corrosive medium environment operate.
- ◆ Avoid the capacitor filled with flammable and explosive gas or dust environment operate.
- ◆ Avoid external energy transmitted to the capacitor internal, such as fire, heat, electricity.
- ◆ Avoid capacitor operate over-temperature.
- ◆ Avoid capacitor abnormal overload.
- ◆ Avoid nuclear radiation.